

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

Lawson Industries, Inc. 8501 NW 90 Street Medley, FL 33166

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami-Dade County) and/ or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.-

DESCRIPTION: Series "SH-7700 (Flange Frame)" Aluminum Single Hung Window - L.M.I.

APPROVAL DOCUMENT: Drawing No. **L7700-0901**, titled "Series-7700 Single Hung Flange Frame Impact Window", sheets I through 5 of 5, dated 05/27/09, with revision **D** dated 11/01/17, prepared by manufacturer, signed and sealed by Thomas J. Sotos, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LIMITATIONS: Insulated Glazing Options Types 6 and 7 are not approved to be installed above 30 feet in height without external protection device (shutters)

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, series, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/ or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises NOA No. 16-1003.01 and consists of this page 1 and evidence pages E-1 and E-2, as well as approval document mentioned above.

The submitted documentation was reviewed by Sifang Zhao, P.E.



5.2.

NOA No. 17-1212.21 Expiration Date: December 27, 2021 Approval Date: February 01, 2018

Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

A. DRAWINGS

- 1. Manufacturer's die drawings and sections. (Submitted under NOA No. 09-0706.09)
- 2. Drawing No. L7700-0901, titled "Series-7700 Single Hung Flange Frame Impact Window", sheets 1 through 5 of 5, dated 05/27/09 with revision **D** dated 11/01/17, prepared by manufacturer, and signed and sealed by Thomas J. Sotos, P.E.

B. TESTS

- 1. Test reports on: 1) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
 - 2) Large Missile Impact Test per FBC, TAS 201-94
 - 3) Cyclic Wind Pressure Loading per FBC, TAS 203-94

along with marked-up drawings and installation diagram of an aluminum single hung window, prepared by Hurricane Engineering & Testing, Inc., Test Reports No. **HETI-09-2530A** and **HETI-09-2530B**, dated 03/02/09, signed and sealed by Candido F. Font, P.E. (Submitted under NOA No. 09-0706.09)

- 2. Test reports on: 1) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
 - 2) Large Missile Impact Test per FBC, TAS 201-94
 - 3) Cyclic Wind Pressure Loading per FBC, TAS 203-94

along with marked-up drawings and installation diagram of an aluminum single hung window, prepared by Hurricane Engineering & Testing, Inc., all Test Reports No. HETI-08-2003C, HETI-08-2004A, HETI-08-2060A & B, HETI-08-2061A & B, HETI-08-2064A & B, dated 03/15/08, signed and sealed by Candido F. Font, P.E. (Submitted under NOA No. 08-0825.17)

- 3. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94
 - 4) Large Missile Impact Test per FBC, TAS 201-94
 - 5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
 - 6) Forced Entry Test, per FBC 2411 3.2.1, TAS 202-94

along with marked-up drawings and installation diagram of an aluminum single hung window, prepared by Fenestration Testing Laboratory, Inc., Test Reports No. FTL-2987 and FTL-2986, dated 04/03/01 and 03/27/01, all signed and sealed by Luis Antonio Figueredo, P.E. (Submitted under NOA No. 01-1009.01)

C. CALCULATIONS

1. Anchor verification calculations and structural analysis, complying with FBC, prepared by Lawson Industries, Inc., dated 05/28/09, revised on 01/18/10, signed and sealed by Thomas J. Sotos, P.E. (Submitted under NOA No. 11-0705.09)

2. Glazing complies with ASTM E1300-09

Sifang Zhao, P.E.

Product Control Examiner NOA No. 17-1212.21

Expiration Date: December 27, 2021 Approval Date: February 01, 2018

Lawson Industries, Inc.

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. 17-0808.02 issued to Kuraray America, Inc. for their "SentryGlas® (Clear and White) Glass Interlayers" dated 12/28/17, expiring on 07/04/23.
- 2. Notice of Acceptance No. 16-1117.01 issued to Kuraray America, Inc. for their "Trosifol® Ultraclear, Clear and Color PVB Interlayers" dated 01/19/17, expiring on 07/08/19.
- 3. Notice of Acceptance No. 17-0712.05 issued to Eastman Chemical Company (MA) for their "Saflex Clear and Color Glass Interlayers" dated 09/07/17, expiring on 05/21/21.

F. STATEMENTS

- 1. Statement letter of conformance, complying with FBC-6th Edition (2017), and of no financial interest, dated November 17, 2017, issued by manufacturer, signed and sealed by Thomas J. Sotos, P.E.
- 2. Statement letter of no financial interest, dated 05/28/09, issued by manufacturer, signed and sealed by Thomas J. Sotos, P.E. (Submitted under NOA No. 11-0705.09)
- 3. Laboratory compliance letter for all Test Reports No. **HETI-09-2530A & B**, issued by Hurricane Engineering & Testing, Inc., dated 03/02/09, signed and sealed by Candido F. Font, P.E. (Submitted under NOA No. 09-0706.09)
- 4. Laboratory compliance letter for Test Reports No. HETI-08-2003C, HETI-08-2004A, HETI-08-2060A & B, HETI-08-2061A & B, HETI-08-2062A & B, HETI-08-2063A & B, HETI-08-2064A &B, issued by Hurricane Engineering & Testing, Inc., dated 03/15/08, signed and sealed by Candido F. Font, P.E.

(Submitted under NOA No. 08-0825.17)

5. Laboratory compliance letter for Test Reports No. FTL-2987 and FTL-2986, issued by Fenestration Testing Laboratory, Inc., dated 04/03/01 and 03/27/01, signed and sealed by Luis Antonio Figueredo, P.E. (Submitted under NOA No. 01-0406.08)


G. OTHERS

1. Notice of Acceptance No. 16-1003.01, issued to Lawson Industries, Inc. for their Series "SH-7700 (Flange Frame)" Aluminum Single Hung Window – L.M.I.", approved on 12/15/16 and expiring on 12/27/21.

Sifang Zhao, P.E.


Product Control Examiner NOA No. 17-1212.21

Expiration Date: December 27, 2021 Approval Date: February 01, 2018

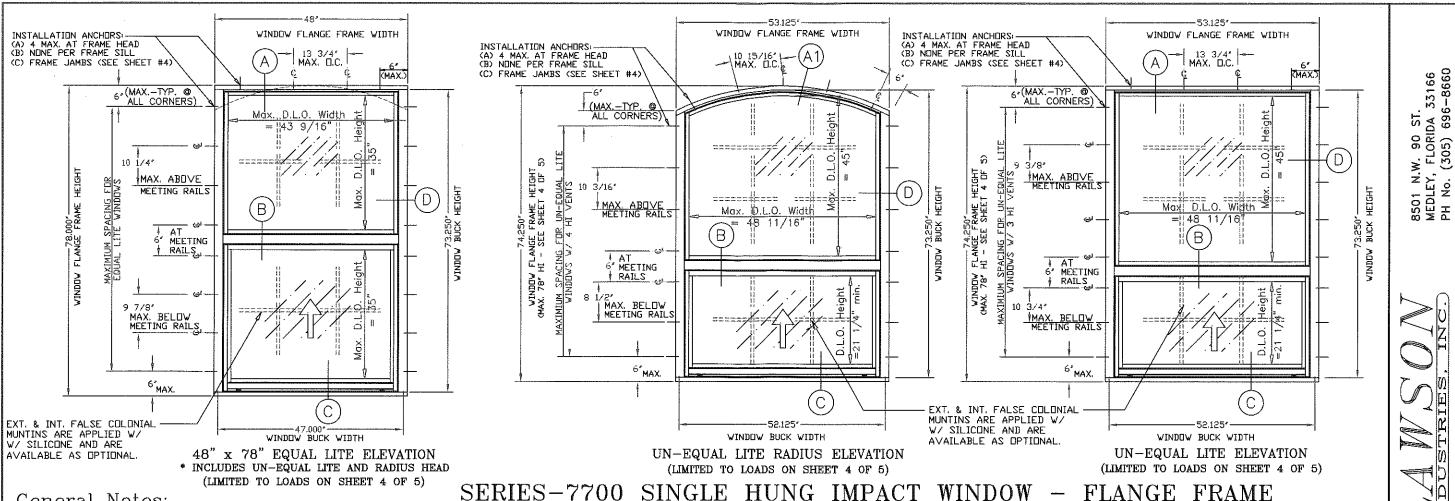

General Notes:

- 1.) THIS WINDOW SYSTEM IS DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE FLORIDA BUILDING CODE (2014-5th Edition & 2017-6th Edition) INCLUDING HIGH VELOCITY HURRICANE ZONE VELOCITY (HVHZ) AND ASTM 1300-09. THIS PRODUCT IS IMPACT RESISTANT. (SHUTTERS NOT REQUIRED)
- WOOD BUCKS SHALL BE INSTALLED AND ANCHORED SO THAT THE BUILDING RESISTS THE SUPERIMPOSED LOADS IN ACCORDANCE WITH THE REQUIREMENTS OF THE F.B.C. & TO BE REVIEWED BY BUILDING OFFICIAL
- ANCHORS SHOWN ABOVE ARE AS PER TEST UNITS. ANCHORS ON ALL WINDOW SIZES ARE NOT TO EXCEED THESE MAXIMUM SPACINGS ON CENTER (O.C.) AND AS TABULATED ON SHEET 4.
- 4.) ANCHOR CONDITIONS NOT DESCRIBED IN THESE DRAWING'S ARE TO BE ENGINEERED ON A SITE SPECIFIC BASIS, UNDER SEPARATE APPROVAL AND TO BE REVIEWED BY BUILDING OFFICIAL
- 5.) WINDOWS ARE QUALIFIED FOR USE WITH SINGLE GLAZE LAMINATED GLASS TYPES TABULATED HEREIN (SEE SHEET #3), AND FOR USE WITH DOUBLE GLAZE LAMINATED INSULATED GLASS TYPES TABULATED HEREIN (SEE SHEET #3).
- 6.) SEE SHEET 3 FOR LOCK DETAILS & OPTIONS.
- 7.) SEE SHEET 4 FOR DESIGN PRESSURES AND GLASS TYPES.
- 8.) FOR OPTIONAL FRAME INSTALLATION DETAILS SEE SHEET 3.
- 9.) EXT. & INT. FALSE COLONIAL MUNTINS ARE OPTIONAL & AND ARE APPLIED W/ SILICONE
- 10.) WOOD BUCKS IN CONTACT WITH CONCRETE MUST BE PRESSURE TREATED AND ANCHORED (BY OTHERS), PRIOR TO WINDOW INSTALLATION. (SEE SHEET #2 FOR DETAIL & NOTES) WOOD BUCKS TO BE ANCHORED IN COMPLIANCE WITH THE FBC CHAPTER 24, SECTION 11.3.3.3.
- 11.) APPROVAL APPLIES TO SINGLE UNITS OR SIDE BY SIDE MULLED UNITS.
- 12.) MULLING SINGLE HUNG WINDOWS WITH OTHER TYPES OF MIAMI-DADE COUNTY APPROVED WINDOWS USING A MIAMI-DADE COUNTY APPROVED MULLION IN BETWEEN ARE ACCEPTABLE BUT THE LOWER DESIGN PRESSURE FROM THE WINDOWS OR MULLION APPROVAL WILL APPLY TO THE ENTIRE MULLED SYSTEM.
- SEE SHEET # 3 FOR MULLION/METAL ATTACHMENT DETAILS & OPTIONS.
- ALL METAL/STEEL IN CONTACT WITH ALUMINUM OR OTHER DISSIMILAR MATERIALS TO BE 14.) PAINTED OR PLATED AND SHALL MEET THE FLORIDA BLDG. CODE

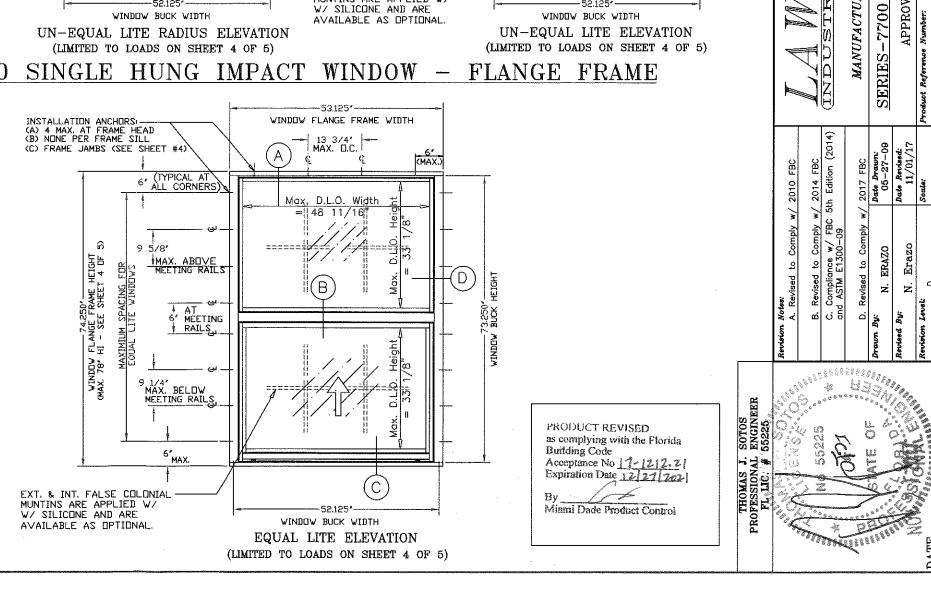

DOORS

GLASS

AND

SMOGNIM

LORIDA 33166 05) 696-8660

FRAME IMPACT WINDOW

AND

CONFIGURATIONS

ELEVATIONS,


APPROVED


FLANGE

SINGLE HUNG

QUALITY

oF

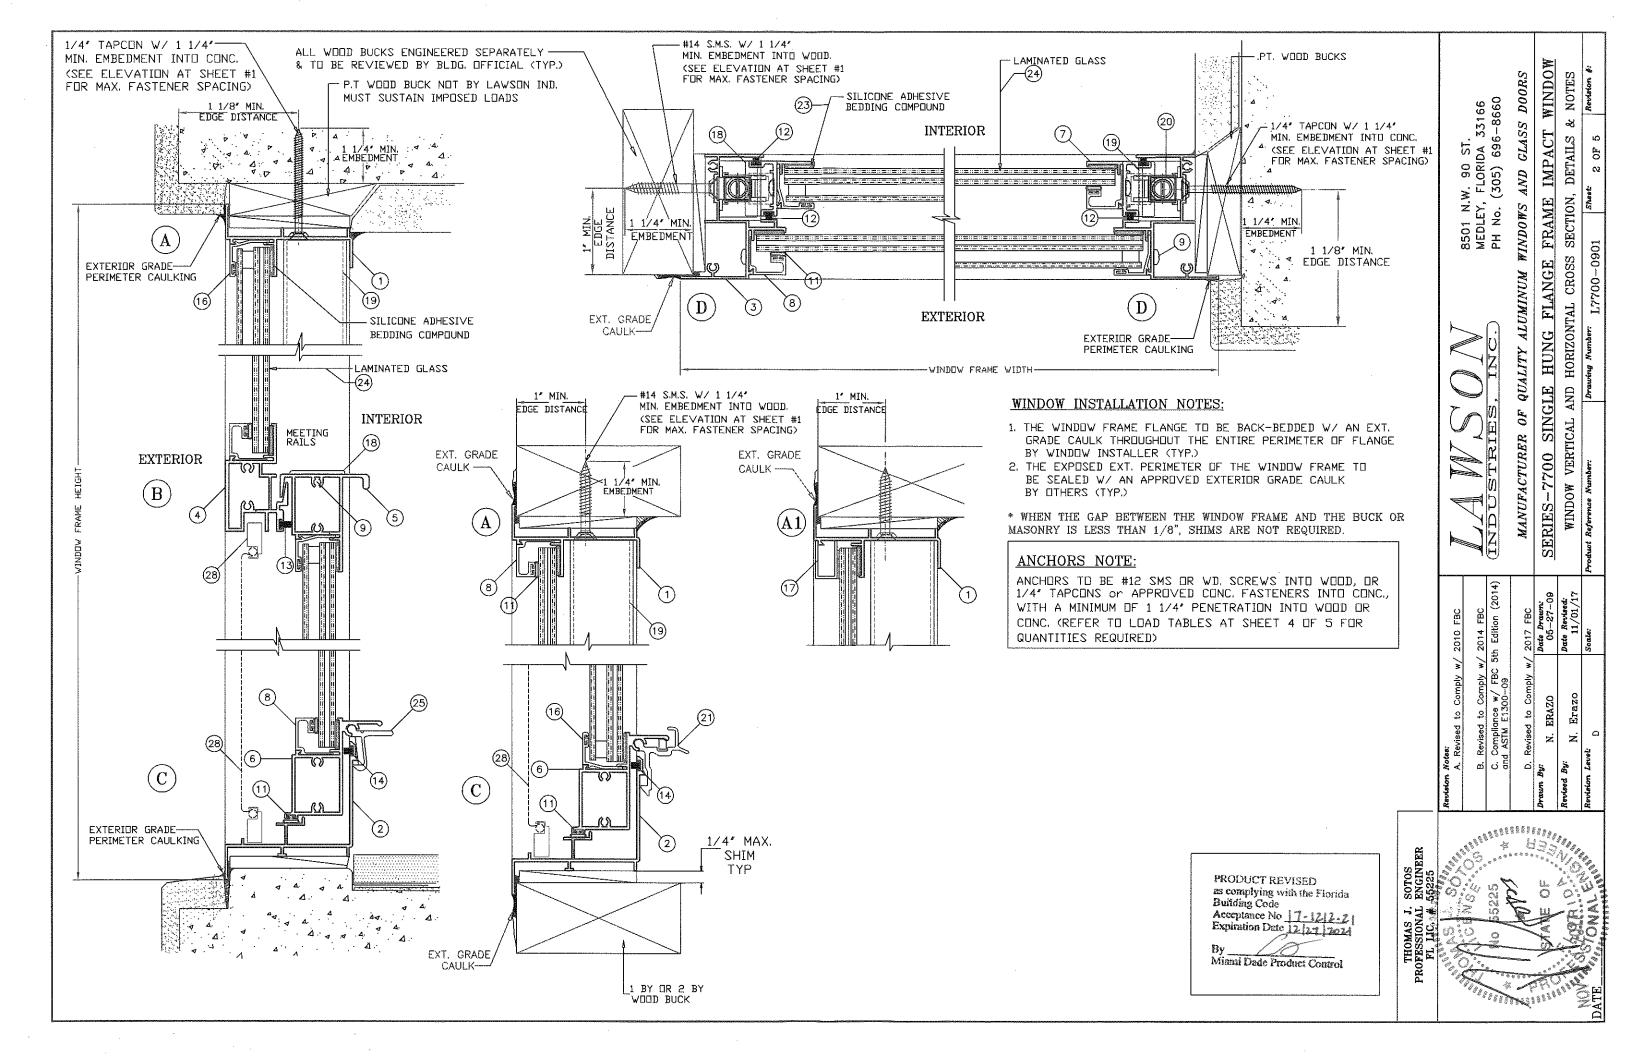




-		LAMINATED GLASS CO	MPOSITION - TYPE 2	
NA ANA ANA ANA	ITEM	GLASS DESCRIPTION	3 DETAIL	LAMINATE DESCRIPTION
	1	1/8' ANNEALED GLASS	1/8'	015(5)(0)(0)
anneau a	2	0.090" PLASTIC INTERLAYER	0.090	SAFLEX PVB by Eastman Chemical co.
TANK PARAMETERS	3	1/8' ANNEALED GLASS	1 1 1 2 0.3401	Edstrial Cherical Co.

and the same			OMPOSITION - TYPE 3	
NO PARTIES	ITEM	GLASS DESCRIPTION	_	LAMINATE DESCRIPTION
SKOTOS	1	1/8" ANNEALED GLASS	.1/8"	SENTRYGLAS by
	5	0.090" PLASTIC INTERLAYER	0.090* 1	Kuraray America, Inc.
	3	1/8' ANNEALED GLASS]	

	LAMINATED GLASS CO	MPOSITION - TYPE 4	
ITEM	GLASS DESCRIPTION	, 3 DETAIL	LAMINATE DESCRIPTION
1	1/8' ANNEALED GLASS	1/8	TROSIFOL PVB by
2	0.090' PLASTIC INTERLAYER	1.1/8	Kuraray America, Inc.
3	1/8" ANNEALED GLASS] (1) (2) 0.340 ²	

	LAMINATED GLASS CO	MPOSITION - TYPE 5	
ITEM	GLASS DESCRIPTION	(3) DETAIL	LAMINATE DESCRIPTION
1	1/8" HEAT-STRENGHTENED GLASS	1/8	TROSIFOL PVB by
2	0.090" PLASTIC INTERLAYER	.0,090	Kuraray America, Inc.
3	1/8" HEAT-STRENGHTENED GLASS	① ② 0.340′	




ł		PATCHETT AMIDID T A MENTALITHE	GLASS COMPOSITION	mype e
I		ENSULATED LAMINATED		TIPE 0
	ITEM	GLASS DESCRIPTION	STAIL	LAMINATE DESCRIPTION
	1	1/8' HEAT-STRENGHTENED GLASS	1/8*	
	2	0.090' PLASTIC INTERLAYER	4 1/4	TROSIFOL PVB by
	3	1/8' HEAT-STRENGHTENED GLASS	.090*	Kuraray America, Inc.
	4	1/4' INSULATED AIR SPACE	1/9/23	
THEFT	5	1/8' ANNEALED GLASS	' (1) (2) (3) 0.340 ⁽	

١.				
		INSULATED LAMINATED	GLASS COMPOSITION	TYPE 7
	ITEM	GIASS DESCRIPTION) S DETAIL	LAMINATE DESCRIPTION
	1	1/8' ANNEALED GLASS	1/8*[
	2	0.090" PLASTIC INTERLAYER	4 1/4"	SAFLEX PVB by
	3	1/8' ANNEALED GLASS	.090*	Eastman Chemical co.
	4	1/4' INSULATED AIR SPACE	1/9	
	5	1/8' ANNEALED GLASS	' 1 (D) (D) (3) 0.340° J	


GLAZING DETAILS AND OPTIONS

NOTE:


WINDOWS WITH GLASS TYPES "6 & 7" INSTALLED ABOVE 30ft IN THE HVHZ, THE I.G. IN THE EXTERIOR LITE SHALL BE TEMPERED TO COMPLY WITH THE SMALL MISSILE IMPACT RESISTANCE REQUIREMENTS (FBC-2017, Chapter 24 Section 2411.3.3.7).

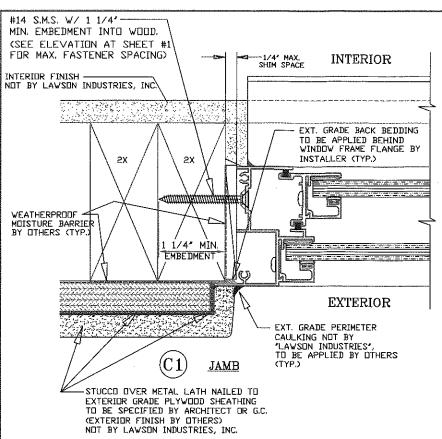

WOOD FRAME INSTALLATION DETAIL

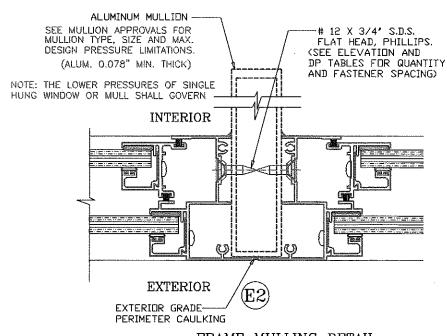


FRAME MULLING DETAIL

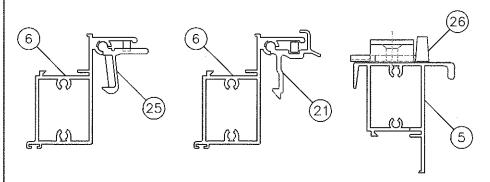



LOCK (LATCH AND SWEEP) OPTIONS

- 1. BOTH EXTRUDED ALUMINUM AND PLASTIC LIFT HANDLE LOCKS ARE QUALIFIED FOR USE ON ALL WINDOWS.
- 2. BOTH DIE CAST AND NYLON CAM LOCKS ARE QUALIFIED FOR USE ON ALL WINDOWS.
- 3. TWO (2) LOCKS ARE REQUIRED PER EACH VENT.

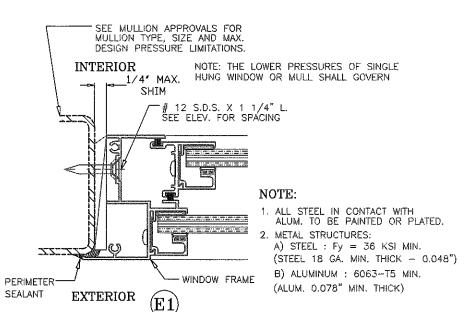

METAL STRUCTURE ATTACHMENT DETAIL





DOORS

GLASS

AND

WINDOWS

IMPACT

FRAME LOCK

OPTIONS 3 OF

æ

GLAZING

DESIGN

SINGLE

SERIES

zi

OF

(2014)


Thy w/ 2014 FBC FBC FBC (3


8501 N.W. 90 ST. MEDLEY, FLORIDA 33166 PH No. (305) 696—8660


DESIGN LOAD CAPACITY (PSF) - VIEW WINDOWS W/3H VENTS						
	#		/ - Pressures (p	sf)		
WINDOW	Jamb	Glass Type	Glass Type	Glass Type		
WIDTH HEIGH	T Anchors	4	5	6		
19.125 50.625	5	60.0	80.0	80.0		
26.5 50.625	· ·	60.0	80.0	80.0		
37 50.625	6	60.0	80.0	80.0		
42 50.625		60.0	80.0	80.0		
48 50.625		60.0	- 80.0	80.0		
53.125 50.625	i	60.0	80.0	80.0		
19.125 59		60.0	80.0	80.0		
26.5 59		60.0	80.0	80.0		
37 59	6	60.0	80.0	80.0		
42 59		60.0	80.0	80.0		
48 59		60.0	80.0	80.0		
53.125 59		60.0	80.0	80.0		
19.125 63		60.0	80.0	80.0		
26.5 63		60.0	80.0	80.0		
37 63	6	60.0	80.0	80.0		
42 63		60.0	80.0	80.0		
48 63		60.0	80.0	80.0		
53.125 63		60.0	80.0	80.0		
19.125 74.25		60.0	80.0	80.0		
26.5 74.25	8	60.0	80.0	80.0		
37 74.25		60.0	80.0	80.0		
42 74.25		60.0	80.0	80.0		
19.125 78		60.0	80.0	80.0		
26.5 78	8	60.0	80.0	80.0		
37 78	0	60.0	80.0	80.0		
42 78		59.0	79.0	79.0		


DESIGN LOAD CAPACITY (PSF) - VIEW WINDOWS W/ 4H VENTS				
	DESIGN LOAD	CAPACITY (PSF) - VIEW WINDOWS	W/4H VENTS

DESIG	N LOAD C		ITY (PSF) - VIEW WINDOWS W/ 4H VENTS				
		#	+ /	/ - Pressures (p	sf)		
WIN	DOW	Jamb	Glass Type	Glass Type	Glass Type		
WIDTH	HEIGHT	Anchors	4	5	6		
19.125	59		60.0	80.0	80.0		
26.5	59		60.0	80.0	80.0		
37	59	6	60.0	80.0	80.0		
42	59	U	60.0	80.0	80.0		
48	59		60.0	80.0	80.0		
53.125	59		60.0	80.0	80.0		
19.125	63		60.0	80.0	80.0		
26.5	63		60.0	80.0	80.0		
37	63	6	60.0	80.0	80.0		
42	63	U	60.0	80.0	80.0		
48	63		60.0	80.0	80.0		
53.125	63		60.0	80.0	80.0		
19.125	74.25		60.0	80.0	80.0		
26.5	74.25		60.0	80.0	80.0		
37	74.25	8	60.0	80.0	80.0		
42	74.25		60.0	80.0	80.0		
53.125	74.25		60.0	80.0	80.0		
19.125	78		60.0	80.0	80.0		
26.5	78	8	60.0	80.0	80.0		
37	78	U	60.0	80.0	80.0		
42	78		59.0	79.0	79.0		










APPROVED CONFIGURATIONS UN-EQUAL LITE

DESIGN LOAD CAPACITY (PSF) - EQUAL LITE WINDOWS								
# + / - Pressures (psf)								
	DOW	Jamb	Glass Type	Glass Type	Glass Type	Glass Type	Glass Type	Glass Type
WIDTH	HEIGHT	Anchors	2	3	4	5	6	7
19.125	26		80.0	80.0	60.0	80.0	80.0	80.0
26.5	26		80.0	80.0	60.0	80.0	80.0	80.0
37	26	4	80.0	80.0	60.0	80.0	80.0	80.0
42	26]]	80.0	80.0	60.0	80.0	80.0	80.0
48	26		80.0	80.0	60.0	80.0	80.0	80.0
53.125	26		80.0	80.0	60.0	80.0	80.0	80.0
19.125	38.375		80.0	80.0	60.0	80.0	80.0	80.0
26.5	38.375		80.0	80.0	60.0	80.0	80.0	80.0
37	38.375	4	80.0	80.0	60.0	80.0	80.0	80.0
42	38.375		80.0	80.0	60.0	80.0	80.0	80.0
48	38.375		80.0	80.0	60.0	80.0	80.0	80.0
53.125	38.375		80.0	80.0	60.0	80.0	80.0	80.0
19.125	50.625		80.0	80.0	60.0	80.0	80.0	80.0
26.5	50.625		80.0	80.0	60.0	80.0	80.0	80.0
37	50.625	6	80.0	80.0	60.0	80.0	80.0	80.0
42	50.625		80.0	80.0	60.0	80.0	80.0	80.0
48	50.625		80.0	80.0	60.0	80.0	80.0	80.0
53.125	50.625		80.0	80.0	60.0	80.0	80.0	80.0
19.125	59		80.0	80.0	60.0	80.0	80.0	80.0
26.5	59		80.0	80.0	60.0	80.0	80.0	80.0
37	59	6	80.0	80.0	60.0	80.0	80.0	80.0
42	59		80.0	80.0	60.0	80.0	80.0	80.0
48	59	[80.0	80.0	-	_	-	80.0
53.125	59		80.0	80.0	-	-		80.0
19.125	63		80.0	80.0	60.0	80.0	80.0	80.0
26.5	63		80.0	80.0	60.0	80.0	80.0	80.0
37	63	6	80.0	80.0	60.0	80.0	80.0	80.0
42	63	ľ	80.0	80.0	60.0	80.0	80.0	80.0
48	63		80.0	80.0	-	-	-	80.0
53.125	63	<u> </u>	80.0	80.0		-		80.0
19.125	74.25		80.0	80.0	60.0	80.0	80.0	80.0
26.5	74.25		80.0	80,0	60.0	80.0	80.0	80.0
37	74.25	8	80.0	80.0	-	-	-	80.0
42	74.25	°	80.0	80.0	-	-	_	80.0
48	74.25		80.0	80.0	-	-	-	80.0
53.125	74.25		74.0	77.0	<u>.</u>	-	-	80.0
19.125	78		80.0	80.0	60.0	80.0	80.0	80.0
26.5	78		80.0	80.0	60.0	80.0	80.0	80.0
37	78	8	80.0	80.0	-	-	-	80.0
42	78		79.0	79.0	-	-	-	79.0
48	78		71.0	71.0	_	-	_	71.0

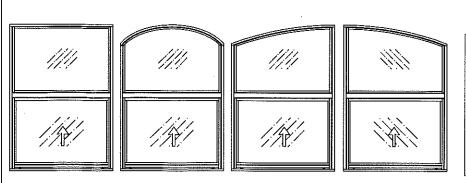

as complying with the Florida
Building Code
Acceptance No 11-1212-21
Expiration Date 12121202

By _______ Miami Dade Product Control

THOMAS PROFESSION, FL LIC.



B. Revised to Comply w/ 2014 FBC
C. Compliance w/ FBC 5th Edition (2014)
and ASTM E1300-09

SERIES-7700 SINGLE HUNG FLANGE FRAME IMPACT WINDOW

MANUFACTURER OF QUALITY ALUMINUM

WINDOWS AND CLASS DOORS

4 OF 5

& CONFIGURATION OPTIONS


DESIGN PRESSURE CHARTS,

N. Erazo

ż


8501 N.W. 90 ST. MEDLEY, FLORIDA 33166 PH No. (305) 696—8660

APPROVED CONFIGURATIONS - EQUAL LITE

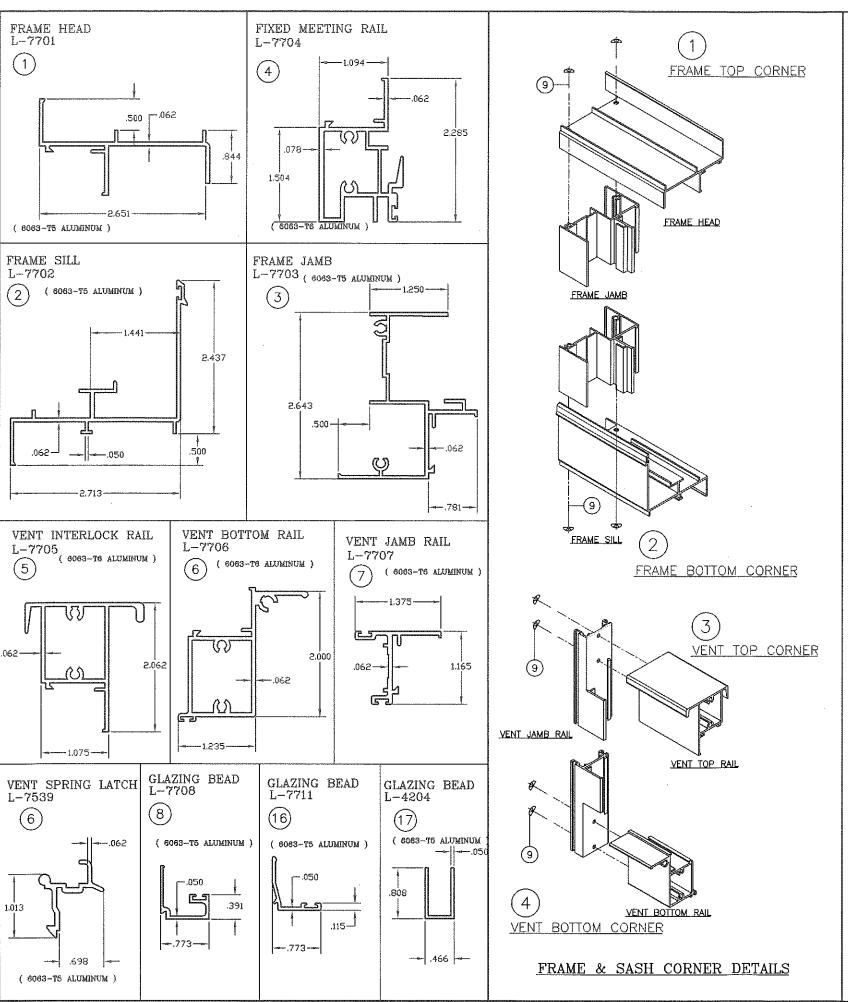

ITEM #	PART #	REQD.	DESCRIPTION	REMARKS
1	L-7801	1	FIN FRAME HEAD	6063-T6 ALUMINUM
2	L-7802	1	FIN FRAME SILL	6063-T6 ALUMINUM
3	L-7803	2	FIN FRAME JAMB	6063-T6 ALUMINUM
4	L-7704	1	FRAME FIXED MEETING RAIL	6063-T6 ALUMINUM
5	L-7705	1	VENT MEETING (TOP) RAIL	6063-T6 ALUMINUM
6	L-7706	1	VENT BOTTOM (LATCH) RAIL	6063-T6 ALUMINUM
7	L-7707	2	VENT JAMB (SIDE) RAIL	6063-T6 ALUMINUM
8	L-7708	AS REQ'D.	GLAZING BEAD (3/8")	6063-T5 ALUMINUM
9	FS-006	AS REQ'D.	FRAME ASSEMBLY SCREWS	#8 X 3/4" P.H. PHILLIP:
10	FS-040	AS REQD.	INSTALLATION SCREWS	#14 X 1 1/4' F.H./PHIL
11	L-7531	AS REQ'D.	BULB VINYL WTS'P	1/4" DIA. BULB #3033
12	PWS-003	AS REQ'D.	FIN SEAL WEATHERSTRIP	.187*x.230*
13	PWS-005	AS REQ'D.	FIN SEAL WEATHERSTRIP	.187 * ×.350 *
14	PWS-009	AS REQ'D.	FIN SEAL WEATHERSTRIP	.187*x.310*
15	HC-024-1	5	SELF ADHESIVE PILE PAD	1/4" X 1 1/2"
16	L-7711	AS REQ'D.	GLAZING BEAD/ INSULATED	6063-T5 ALUMINUM
17	L-4204	AS REQ'D.	GLAZING BEAD - RADIUS	6063-T5 ALUMINUM
18	L-7723	1	SASH BALANCE CAM/GUIDE	(2 X VENT)
19	L-7725	2	RIGID VINYL SASH STOP	(2 X FRAME)
20	L-7727	2	BLOCK & TACKLE BALANCE	BSI Balance Systems
21	L-7539	2	VENT LIFT LATCH	6063-T5 ALUMINUM
22	L-7523	1X LATCH	VENT LATCH SPRING	STAINLESS STEEL
23	*	AS REQ'D.	GLAZING SILICONE	SEE GLAZING @ SHT. 3
24	*	2	Laminated Glass	SEE GLAZING DETAILS
25	HC-057-1	2	VENT LIFT LATCH	MOLDED NYLON
26	HC-058-1	2	VENT SWEEP LATCH	MOLDED NYLON
27	*	2	FRAME SILL FOAM GASKET	SELF ADHESIVE
28	HC-026-1	1	SCREEN FRAME & MESH	
29	L-7730	1	PRODUCT LABEL	
30	*	*	*	*
31	SM-5504	AS REQ'D.	JOINT SEALANT	SM-5504
32	*	AS REQ'D.	PERIMETER ACRYLIC CAULK	DSI POLYSEAMSEAL

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 17-1212-21
Expiration Date 12/21/2021
By
Miami Dade Product Control



ply w/ 2014 FBC FBC 5th Edition (2014) SERIES-7700 SINGLE HUNG FLANGE FRAME IMPACT WINDOW

DETAILS

EXTRUSION

BILL OF MATERIALS,

ASSEMBLY DETAILS

GLASS DOORS

AND

QUALITY

8501 N.W. 90 ST. MEDLEY, FLORIDA 33166 PH No. (305) 696-8660